

AD-A043651

RIA-77-U1112

AD A043651

DRSAR/SA/N-67

TECHNICAL
LIBRARY

SYSTEMS ANALYSIS DIRECTORATE

ACTIVITIES SUMMARY

MAY 1977

TECHNICAL
LIBRARY

JUNE 1977

Approved for public release; distribution unlimited.



US ARMY ARMAMENT MATERIEL READINESS COMMAND

SYSTEMS ANALYSIS DIRECTORATE

ROCK ISLAND, ILLINOIS 61201

DISPOSITION

Destroy this report when no longer needed. Do not return it to the originator.

DISCLAIMER

The findings in this report are not to be construed as an official Department of the Army position.

WARNING

Information and data contained in this document are based on input available at the time of preparation. Because the results may be subject to change, this document should not be construed to represent the official position of the US Army Development & Readiness Command unless so stated.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER DRSAR/SA/N-67	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) SYSTEMS ANALYSIS DIRECTORATE ACTIVITIES SUMMARY MAY 1977		5. TYPE OF REPORT & PERIOD COVERED Note - Final
7. AUTHOR(s)		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS US Army Armament Materiel Readiness Command Systems Analysis Directorate (DRSAR-SA) Rock Island, IL 61201		8. CONTRACT OR GRANT NUMBER(s)
11. CONTROLLING OFFICE NAME AND ADDRESS US Army Armament Materiel Readiness Command Systems Analysis Directorate (DRSAR-SA) Rock Island, IL 61201		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE June 1977
		13. NUMBER OF PAGES 29
		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES Additions or deletions of addresses to/from the distribution list are invited and should be forwarded to the address below. Inquiries pertinent to specific items of interest may be forwarded to Commander, US Army Armament Materiel Readiness Command, ATTN: DRSAR-SA, Rock Island, IL 61201 (AUTOVON 793-4483/4628).		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Target Acquisition NATO AC/225 Muzzle Flash Detection		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This monthly publication contains Memoranda for Record (MFR's) and other technical information that summarize the activities of the Systems Analysis Directorate, US Army Materiel Readiness Command, Rock Island, IL. (The most significant MFR's and other data will be published as notes or reports at a later date.) The subject dealt with is Target Acquisition.		

CONTENTS

	<u>Page</u>
Response to AMSAA Request for Acquisition Data in Support of NATO AC/225 (Panel III S.P.3)	5
DISTRIBUTION LIST	26

Next page is blank.

DRSAR-SA (11 Apr 77) 1st Ind

2 JUN 1977

SUBJECT: Request for Acquisition Data in Support of NATO AC/225
(Panel III S.P.3)

HQ, US Army Armament Materiel Readiness Command, Rock Island, IL 61201

TO: Director, US Army Materiel Systems Analysis Activity, ATTN: DRXSY-GI,
Aberdeen Proving Ground, MD 21005

1. Reference is made to the inclosed Memorandum for Record, subject:
Response to AMSAA Request for Acquisition Data in Support of NATO AC/225
(Panel III S.P.3).

2. The response to the subject request is contained in the referenced
memorandum. For clarification or further details contact Mr. George Schlenker
(AUTOVON 793-5075/5930).

FOR THE COMMANDER:

SIGNED

1 Incl
as

M. RHIAN
Director
Systems Analysis Directorate



DEPARTMENT OF THE ARMY

U. S. ARMY MATERIEL SYSTEMS ANALYSIS ACTIVITY
Aberdeen Proving Ground, Maryland 21005

Mr. Clifford/dak/283-4488

Sherm

S: 22 Apr 77

27 May 77

11 APR 1977

DRXSY-GI

SUBJECT: Request for Acquisition Data in Support of NATO AC/225
(Panel III S.P.3)

SEE DISTRIBUTION

1. Presently, Subpanel 3 of AC/225 (Panel III) is initiating a more concentrated effort on the subject of Target Acquisition. This follows termination of the discussion of a proposal from EASAMS, Ltd., of the United Kingdom for a long-term (and expensive) study of the subject. As a starting point for renewing discussions on this subject and determining a direction for the overall effort, each country has been asked to provide the target acquisition data currently used in their studies. In addition, any studies which give estimates of the importance of detection probability on battle outcomes are to be reported. SHAPE Technical Center made such a presentation at the last meeting of the Subpanel.

2. It is requested that you provide the target acquisition information for armor and antiarmor weapons used in your simulations or other analyses. Actual estimates of detection and recognition probabilities and the associated times as a function of the various conditions simulated (e.g., moving, stationary, fully exposed, hull defilade, detection following firing as opposed to non-firing, etc.) should be provided. A description of the predictive methodology and specification of the values assumed for the pertinent random variables should also be provided. Where possible, the data sources should be indicated. Any studies which have been carried out indicating the overall importance of the acquisition parameters on battle outcomes should also be described.




DRXSY-GI

11 APR 1977

SUBJECT: Request for Acquisition Data in Support of NATO AC/225
(Panel I (I S.P.5))

3. It is requested that this information be provided to AMSAA by 27 May 1977, with designation of a point of contact by 22 April 1977, (ATTN: Walter Clifford, AUTOVON 283-4488).

FOR THE DIRECTOR:



JOHN W. KRAMAR
Acting Chief
Ground Warfare Division

DISTRIBUTION:

Cdr, USA TRADOC Systems Analysis Activity, White Sands Missile Range,
New Mexico 88002

Cdr, USA Combined Arms Combat Developments Activity, Ft. Leavenworth,
Kansas 66027

Cdr, USA Concepts Analysis Agency, 8120 Woodmont Avenue, Bethesda,
Maryland 20014

Cdr, USA Missile Research & Development Command, Redstone Arsenal,
Alabama 35809

✓ Cdr, USA Armament Materiel Readiness Command, Rock Island, IL 61201

Cdr, USA Armament Research & Development Command, Dover, NJ 07801

Dir, USA Night Vision Laboratory, Ft. Belvoir, Virginia 22060

CF:

HQDA (DAMA-WSM) LTC Roesler

Comdt, USAIS, ATTN: ATSH-I-MS-F (Mr. Brown)

Cdr, MIRADCOM, ATTN: DRSMI-RFG (Mr. Evans)

2 JUN 1977

MEMORANDUM FOR RECORD

SUBJECT: Response to AMSAA Request for Acquisition Data in Support of
NATO AC/225 (Panel III S.P.3)

1. References:

a. Methodology Addendum to the Cannon Launched Guided Projectile (CLGP) Cost and Operational Effectiveness Analysis (COEA), USAFAS, April 1974.

b. MFR, DRSAR-SAM, 7 Jul 76, subject: Algorithm for Estimating Detection Probabilities and Times for Muzzle Flashes at Night. This MFR appears in the Systems Analysis Directorate Activities Summary August 1976, DRSAR/SA/N-54 (AD No. A030892).

2. This memorandum is written in response to the subject request from AMSAA for information regarding acquisition of armored targets. Two models have been used by DRSAR-SAM for characterizing the acquisition of armored targets by observers having only binoculars for optical assistance. Both models are of a summary nature, suitable for inclusion in large-scale battlefield simulations.

3. Daylight Acquisition Model.

The first model is applicable to daylight conditions in the presence of an isotropic, scattering aerosol. This model was used during the CLGP COEA (Ref 1a). A special case of Bailey's model (Attachment 1) was used in the ARMCOM Operational Simulation Model (OSM) to describe the acquisition of moving armored targets by artillery forward observers (FO). The scenario treated by OSM was such that detection was tantamount to acquisition, i.e., recognition was unnecessary. As a simulated target moves along a tactical path within OSM, discrete probabilities of acquisition within the next second are calculated (each second) whenever the target enters an FO's field of view. These probabilities are used to determine if the stochastic event of acquisition occurs during the next second. If acquisition does not occur and the target remains intervisible, the updated event calculation is repeated.

4. The probability of acquisition within time t , given target entry into the visual field at time zero, $P(t)$, depends upon the acquisition rate

2 JUN 1977

DRSAR-SAM

SUBJECT: Response to AMSAA Request for Acquisition Data in Support of
NATO AC/225 (Panel III S.P.3)

parameter λ (sec^{-1}). For the OSM scenario,


$$\lambda = (11.6)^{-1} \exp - 3.9 R/R_v,$$

with R the observer-to-target range and R_v the meteorological visibility range (same units as R). The constant coefficient in the expression for λ is typically a function of a number of parameters, as explained in Attachment 1. Then,

$$P(t) = 1 - e^{-\lambda t}$$

Given intervisibility and a constant value of R during a target search, the mean search time is λ^{-1} .

5. Graphical results for this model are displayed in Figures 1, 2, and 3. The probability of acquisition within t is shown as a function of range in Figure 1. The mean search time for several values of R_v is shown as a function of range in Figure 2. Figure 3 shows the probability of acquisition at range R as a function of search time.

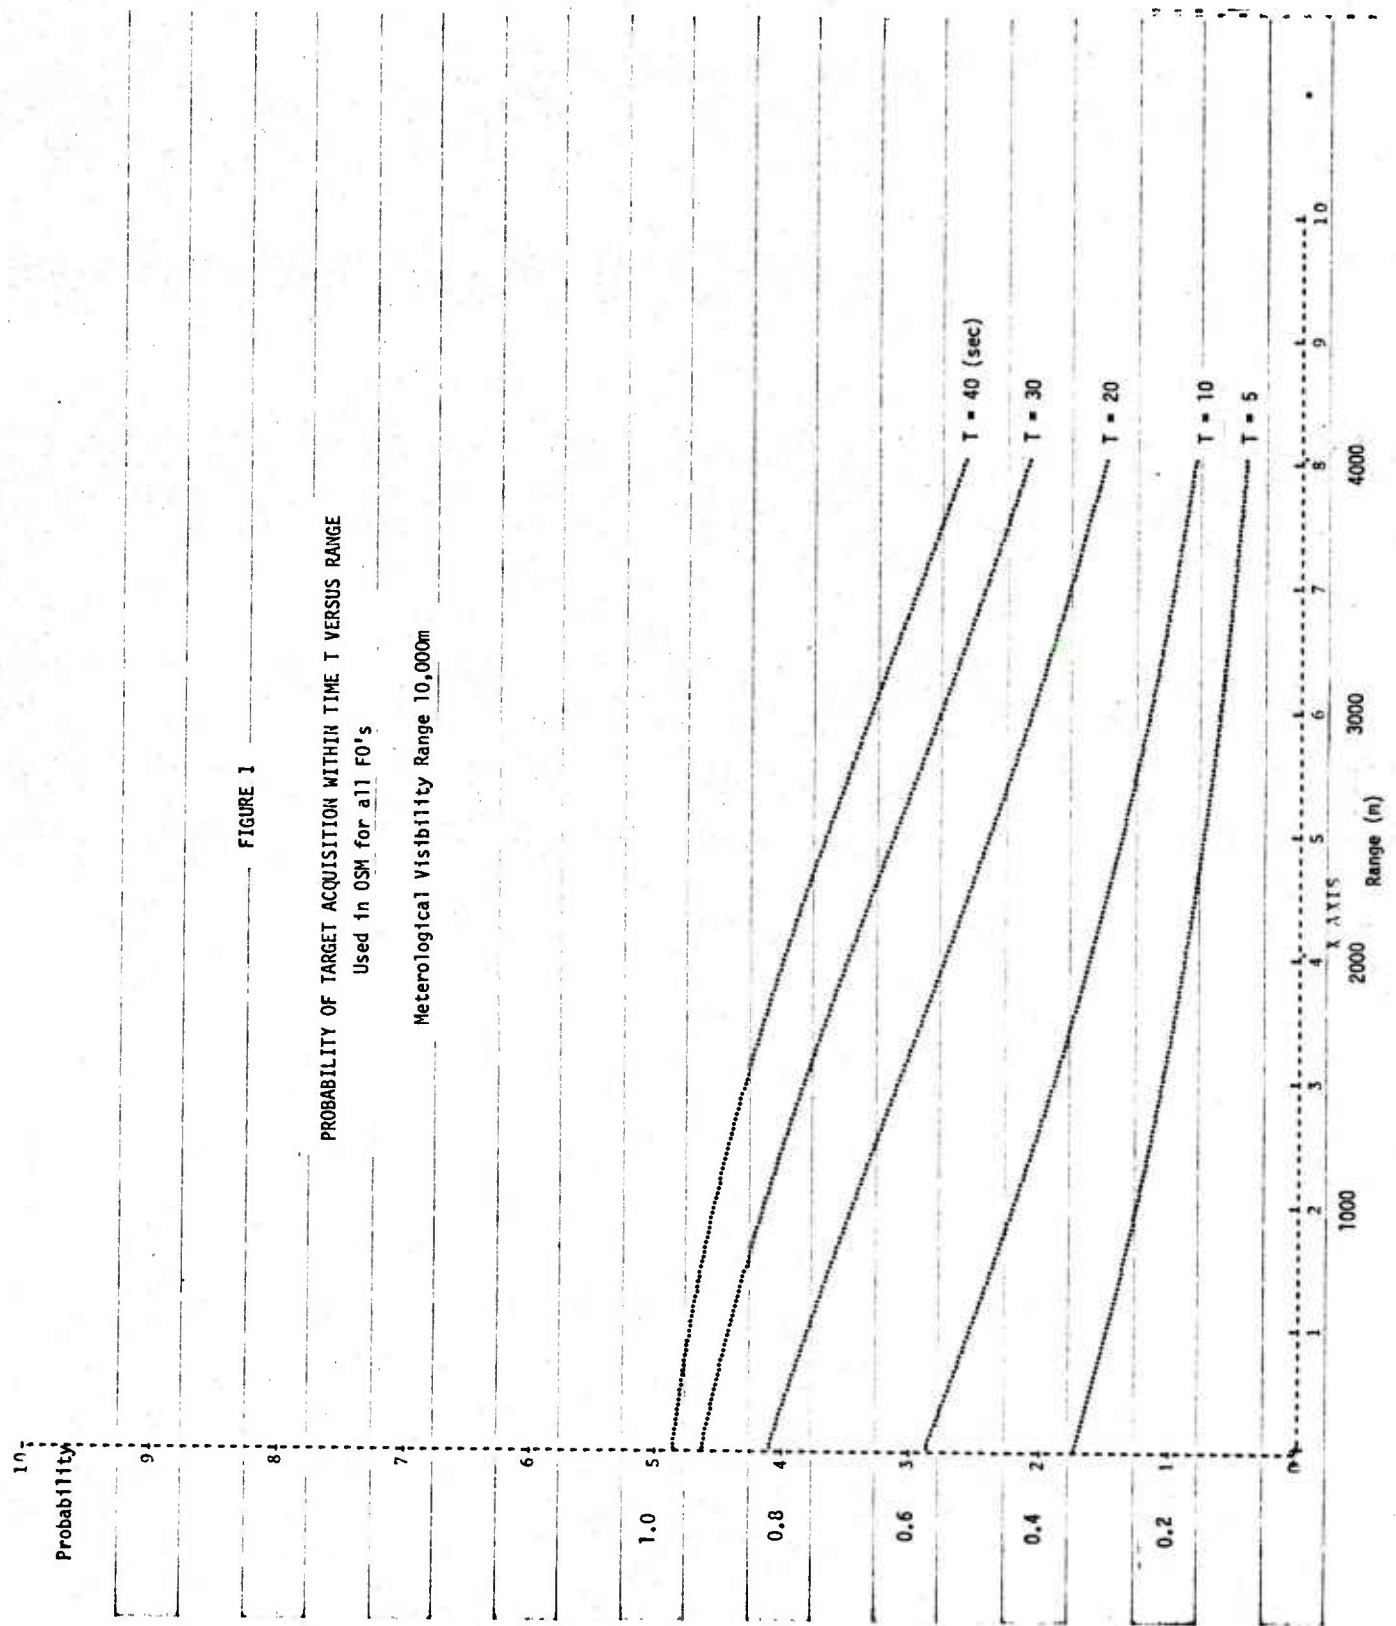

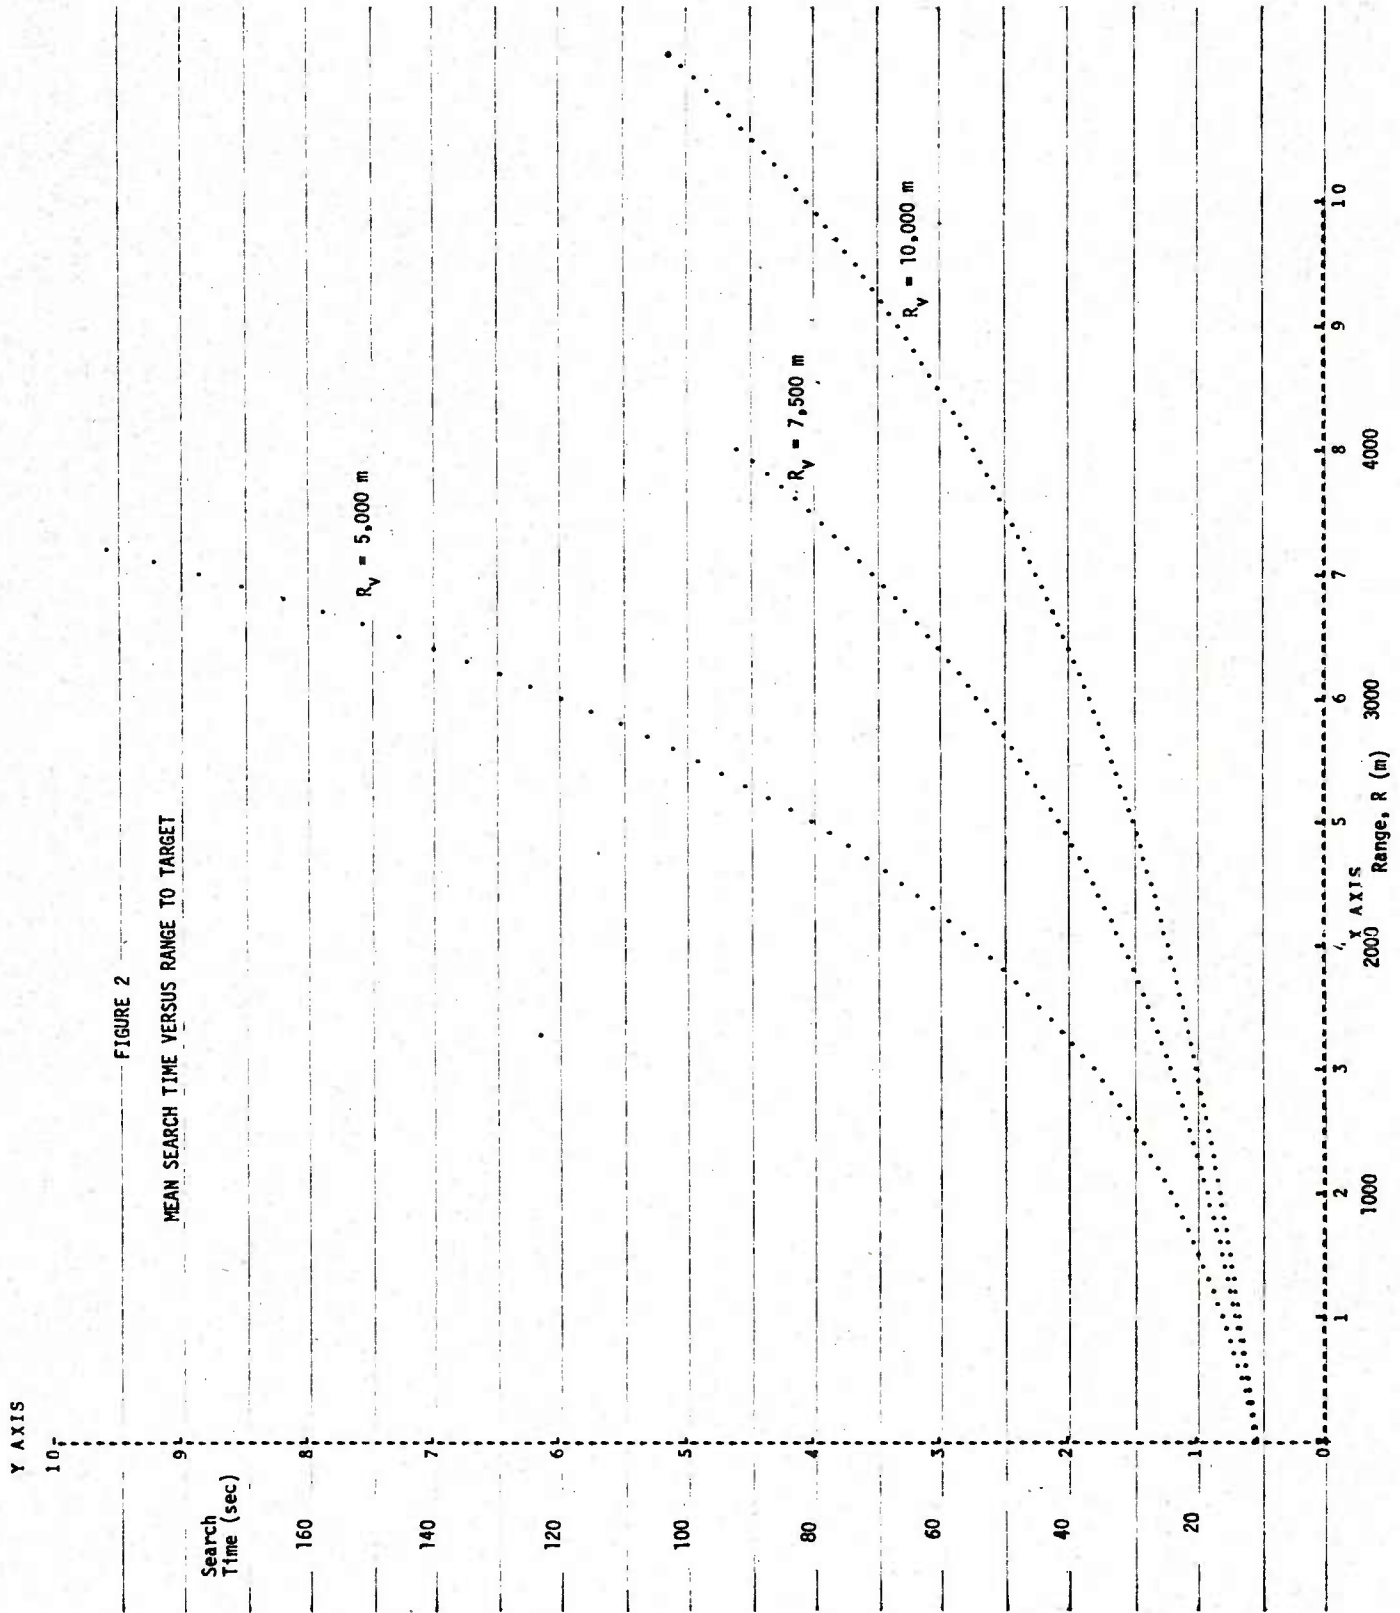


FIGURE 2
MEAN SEARCH TIME VERSUS RANGE TO TARGET

Y AXIS

DOF (REVIEW RECORD)

START

FIXED FILE #

KEY = 112

RSIN = 0

SHIN = 00

SHAX = 827

END

9


READY

Probability

FIGURE 3

PROBABILITY OF ACQUISITION AT RANGE R VERSUS TIME

$R_v = 10,000 \text{ m}$

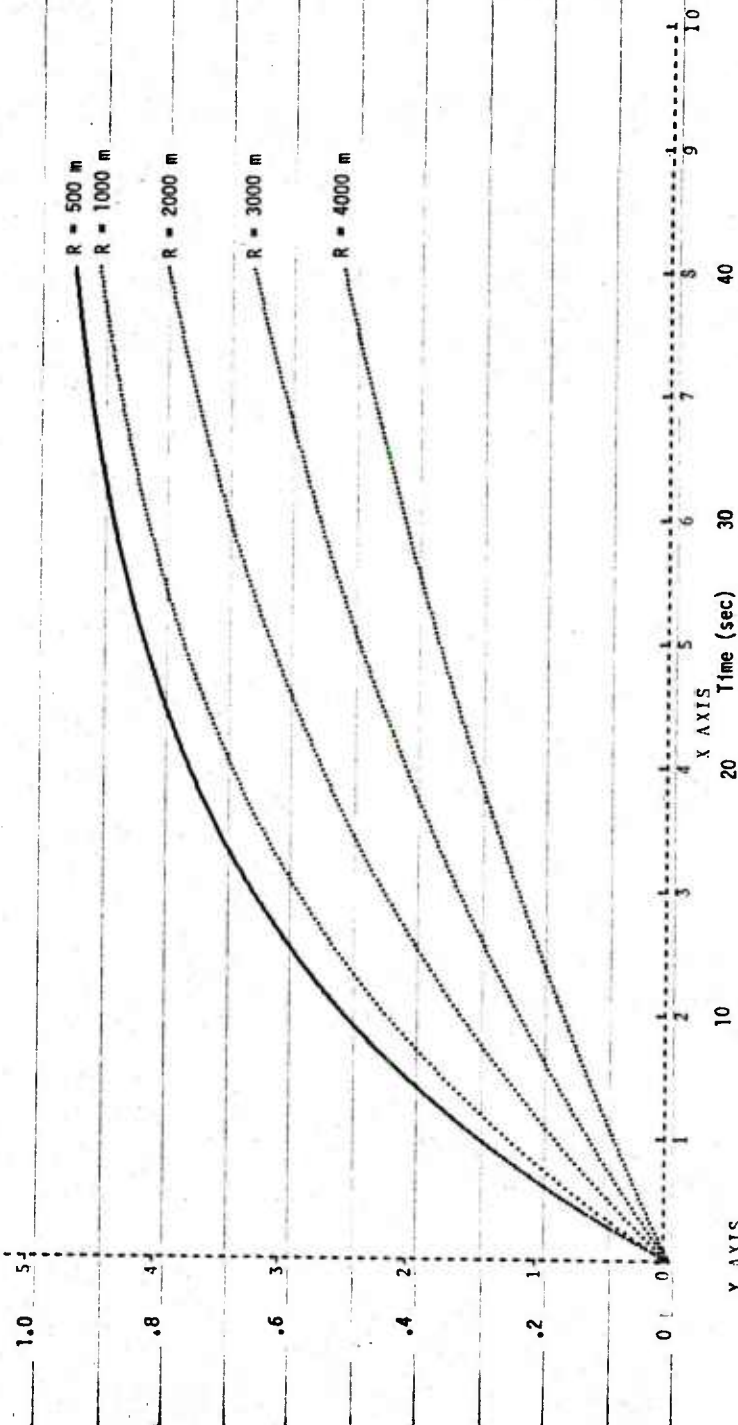

JUN 197

DRSAR-SAM

SUBJECT: Response to AMSAA Request for Acquisition Data in Support of
NATO AC/225 (Panel III S.P.3)

6. Night Time Model for Muzzle Flash Detection

The guns associated with most armor and SP artillery exhibit significant visual muzzle flash. This signature permits detecting and locating these targets at night by unaided visual means. Reference b discusses a summary algorithm for detecting targets which exhibit periodic muzzle flash when the background luminance is 10^{-3} ft-lambert or less. Light scattering by a homogenous isotropic aerosol is also accounted for in this model. This algorithm is based primarily upon the human factors studies of Blackwell relative to foveal detection of transient light sources. The MFR in Ref 1b is included in SA Note 54, available through the DDC.

George Schlenker
GEORGE SCHLENKER
Operations Research Analyst
Methodology Division
Systems Analysis Directorate

ATTACHMENT 1

A MODEL FOR THE DETECTION AND RECOGNITION OF TANK TARGETS BY ARTILLERY GROUND OBSERVERS

This mathematical model is a derivative of one proposed by H. H. Bailey of the Rand Corp. Additional information is provided by Dugas and Peterson of Rand. Although semiempirical in nature, this model has not been thoroughly validated as a whole.

Phenomenological Structure

As represented by Bailey the task of finding and recognizing a known object in a complex field within a short period of time follows a sequence of three distinct steps. A deliberate and reasonably systematic search is made to place the object within foveal vision. Given superposition by the fovea a detection of contrast must occur. Finally a recognition based on form may follow given the detection of contrast. The process of recognition characterized by this sequence is discrete in time occurring in "glimpses", each lasting $1/3$ second. Thus the glimpse rate is 3 per second.

A Special Case of Bailey's Model

We consider here a specialized form of Bailey's model in which the search is conducted in an almost linear manner across the visual field (FOV) of the unassisted observer near his horizon. This presumes that the observer is on the ground and that the range of terrain elevations across his FOV is not too large. It is postulated that the observer will generally scan for targets at a range at which under the prevailing atmospheric conditions he has some non-negligible probability of detecting target to background contrast. For tank-sized targets the estimated scan range is about 2400 m under good viewing conditions.

Depending on aspect and degree of terrain masking the presented area of a tank varies from about 10 to 20 m^2 . Consider a tank with presented area $16 m^2 = a_t$. According to Bailey the observer adjusts the area encompassed by his glimpse, A_g to be approximately 100 times the area of the target at the scan range. That is,

$$A_g \approx 100 a_t.$$

The factor of 100 varies with scene congestion but is the typical value based upon perceptual experiments. The area encompassed by the glimpse is then 1600 m^2 . The linear dimension of a square glimpse aperture is then 40 m. At the estimated scan range, the angular subtense of the linear glimpse interval is about 17 milliradians (i.e., $40/2400$).

For an observer 2 m above a level earth, the radial range interval covered by this angular glimpse interval extends from about 120 m to the horizon. Thus the observer conducts a systematic, essentially linear scan across the horizon within some prescribed angular FOV ϕ at an angular glimpse interval of about one degree for each third of a second, i.e., at a scan rate of nearly 3 degrees per sec.

Notationally let

$\pi_1 = \text{Prob} [\text{observer places foveal vision over the target in one glimpse interval}]$.

Also

$P_1 = P_1(t) = \text{Prob} [\text{target has been covered by time } t]$.

Assuming a random placement of the target in the field of view ϕ , the probability of covering a target of minimum linear dimension typical of a tank in one glimpse is given approximately by

$$\pi_1 = 17 \cdot 10^{-3} / \phi$$

for $\phi \gg 17 \cdot 10^{-3}$ radians.

The rate of successful foveal superpositions implied by this probability is

$$\lambda_1 = 3 \pi_1 \approx 0.05 \phi^{-1}. \quad (1)$$

The time-dependent probability of a successful foveal superposition is then approximately

$$P_1(t) = 1 - e^{-\lambda_1 t}.$$

By comparison with equation (1), the first-order rate constant given by Bailey for this process is

$$\lambda_1' = \frac{700 \text{ at}}{G A_s}$$

for the search area A_s with G depending on the degree of scene congestion.

$$1 \leq G \leq 10.$$

Using the nominal values

$$a_t = 16 \text{ m}^2$$

$$A_s = 40 \text{ (2400 } \phi) \text{ and } G = 1$$

$$\lambda_1' = 117 \cdot 10^{-3} / \phi$$

This estimate of λ_1 is 2.3 times the value given (1). The discrepancy between λ_1 and λ_1' is accounted for by noting that Bailey has presumed that the search may not be perfectly random. He argues that a "successful" search rate of 300 a_t per second, compared to the "required" rate of A_s/t , is adjusted to produce a value of $P_1 = 0.9$. Consequently the value of λ_1 is adjusted by the multiplicative constant K so that

$$P_1 = 1 - \exp(-K), \text{ with } P_1 = 0.9.$$

This reasoning is tenuous at best and serves to identify a source of uncertainty in λ_1 .

Bailey's Contrast Term

The following definitions and notational conventions are observed.

Let

P_2 = Prob [target will be detected if glimpsed foveally in the absence of noise].

By definition, curves of threshold (50% detection probability) contrast versus size of circular discs under various levels of illumination are called demand contrast functions. The contrast of the target relative to the background is defined as follows.

target contrast $= C = \frac{\text{luminance of target} -$

$\text{luminance of background}}{\text{luminance of background}}$

Threshold contrast, C_T , is obtained as follows.

Let

$\bar{\alpha}$ = angular subtense of the minimum target dimension in minutes of arc

α = angular subtense in radians

$$\bar{\alpha} = 3438 \alpha \quad (2)$$

The demand contrast function can be developed from the approximation

$$(\log_{10} C_T + 2)(\log_{10} \bar{\alpha} + 0.5) = 1 \quad (3)$$

or

$$C_T = \exp [2.302585 [(\log_{10} \bar{\alpha} + 0.5)^{-1} - 2]].$$

Alternatively

$$C_T = \exp \left[\frac{5.3018976}{\ln \alpha + 9.29393} - 4.60517 \right] \quad (3a)$$

Then, approximately

$$P_2 = 0.5 \pm 0.5 [1 - e^{-4.2 [(C/C_T) - 1]^2}]^{1/2} \quad (4)$$

with + chosen when $C > C_T$ and - chosen when $C < C_T$.

The apparent contrast of the target will vary with slant range, d , to the target in approximately the following manner.

$$C = C_0 e^{-cd} \quad (5)$$

with

$$c = 3.912 / VR$$

where VR is the visibility range and d the slant range in kilometers. The intrinsic contrast is C_0 .

Example

Suppose a tank of minimum linear dimension 4 meters is located at 2 km from the observer

Then $\alpha = 2 \cdot 10^{-3}$ radians

or $\bar{\alpha} = 6.876$ minutes

From (3) or (3a)

$$C_T = 0.056$$

If $C_O = 0.2$ and $VR = 10$ km,

$$C = 0.0914 \quad (\text{from (5)})$$

$$\text{And } C/C_T = 1.632$$

Then $P_2 = 0.9509$.

Bailey's Resolution Term

Let

$$P_3 = \text{Prob [target is recognized correctly, given detection]}$$

Then, in the absence of prior information concerning the identity of the object detected

$$P_3 = 1 - \exp \left[-\left(\frac{N_r}{2} - 1\right)^2 \right], \quad N_r \geq 2$$
$$= 0, \quad N_r < 2 \quad (6)$$

with N_r the number of resolution cells in the scene (or display) contained in the minimum dimension of the projected image of the target. A "resolution cell" as used here is the size of an independently detectable spot, with detection probability 0.90, at the contrast level with which the spot is presented to the observer.

The value of N_r can be computed by finding the image subtense α' which yields a demand contrast C_T' .

$$C_T' = C'/1.5 \quad (7)$$

where C' is the presented (observed) contrast of an image with subtense α' . For unassisted vision, the observed contrast of the image of subtense α is identical to that of an image of subtense α' . Note that $C'/C_T' = 1.5$ when $P_2 = 0.9$.

$$\text{Then } N_r = \alpha/\alpha' \quad (8)$$

Example

Suppose that the apparent size of the target is $2 \cdot 10^{-3}$ radians or 6.876 minutes, equivalent to a 4 meter target at 2 km. Then the demand contrast is

$$C_T = 0.056$$

Also suppose that the apparent contrast of the target relative to the background is 0.1 (C'). Then from (7)

$$C_T' = 0.1/1.5 = 0.06667.$$

For the last value of demand contrast, the associated value of target size as given by (3) is

$$\bar{\alpha}' = 5.173 \text{ minutes}$$

$$\text{or } \alpha' = 1.505 \cdot 10^{-3} \text{ radians.}$$

Then α' is the size of the resolution element and

$$N_r = 2/1.505 = 1.329.$$

For this value equation (6) yields $P_3 = 0$.

However when the observer has prior information indicating that any foreign presence in the scene is a target, detection is tantamount to recognition and P_3 should be set to unity.

Modifications of Bailey's Recognition Model

As Bailey formulated his model the human observer is postulated to perform a series of glimpses or Bernouilli trials, each lasting $1/3$ second in duration. On each trial there is a finite probability of foveal superposition, of detection of contrast given superposition, and of recognition of form given detection. Each of these events leading to recognition is regarded as independent. Consequently the probability of recognition on a single glimpse is

$$P_1 P_2 P_3$$

If this quantity is very small relative to unity, the binomial expression for the probability of recognition after n trials in time t can be replaced with the Poisson approximation

$$P_r = 1 - e^{-Bt} \quad (9)$$

with rate parameter $B = 3 \pi_1 P_2 P_3$

$$B = \lambda_1 P_2 P_3$$

since each trial occupies 1/3 second. This expression differs from that used by Bailey who writes

$$P_r = P_1 P_2 P_3$$

with $P_1 = 1 - e^{-\lambda_1 t}$.

This latter expression implies that there is a finite probability that recognition will never occur even when the probability of recognition on a single glimpse is finite.

Another change is required in Bailey's model to account for target motion. Experiments by Dugas and Peterson at Rand Corp. have shown that the effect of target motion is to increase the rate parameter B by a factor of

$$1 + 1477 \omega^2$$

with ω the presented angular rate of the target in radians/sec. Then a complete expression for the detection rate in the absence of noise in the display is

$$B = \lambda_1 P_2 P_3 (1 + 1477 \omega^2). \quad (10)$$

The time dependence of parameters involved in B has been suppressed in Bailey's formulation. In cases where relative position of observer and target changes substantially during an observation period and thus may change apparent target size and contrast, it is necessary to compute recognition probability incrementally (or differentially) for time intervals over which the parameters are essentially constant. Thus the probability of recognition within a time interval $(0, t_n)$ can be written using the recurrence relation

$$P_r(t_n) = P_r(t_{n-1}) + p_r(u_n)(1 - P_r(t_{n-1})), n \geq 1$$

with

$$t_n = \sum_{i=1}^n u_i$$

$$p_r(u_n) = 1 - e^{-B_n u_n} \quad (11)$$

and $P_r(t_0) = 0, t_0 = 0$.

The values of the parameters prevailing over the interval $u_n = t_n - t_{n-1}$ are used in computing B_n .

In digital simulations involving a recognition process, the time at which recognition occurs is that time for which P_r exceeds a previously drawn uniform random number U . The recognition algorithm is regularly called at intervals of length u in order to update P_r . The value of u chosen should be such as to result in little change in the parameters over u , but in no case should u be less than 1/3 second because of the discrete nature of the recognition process.

If the parameters describing the scene are reasonably constant for an extended period of observation, the mean time to recognize is just B^{-1} .

Example

Assume that an observer is searching a 57.3 degree sector for a tank whose presented dimensions are 3 X 4 meters. Assume the tank going 5 m/sec is at 2 km with intrinsic contrast of 20% and that atmospheric visibility is 10 km. The observer is assumed to conduct his search with unaided vision but at detection recognition is facilitated by use of binoculars so that $P_3 = 1$.

Using the minimum tank dimensions the minimum angular subtense is

$$\alpha = 3/2000 = 1.5 \cdot 10^{-3} \text{ radians}$$

$$\bar{\alpha} = (3438)(1.5 \cdot 10^{-3}) = 5.157 \text{ minutes}$$

$$\log_{10} \bar{\alpha} = 0.71240$$

From (3),

$$\begin{aligned} \log_{10} C_1 &= (1/1.2124) - 2 = -1.17519 \\ &= 0.8248 - 2 \end{aligned}$$

(demand contrast) $C_T = 6.676 \cdot 10^{-2}$

From (5) the actual contrast is given by

$$C = 0.2 e^{-(0.3912)^2}$$

$$C = 0.0914$$

and $C/C_T = 1.369$.

From (4),

$$P_2 = 0.83$$

From (1),

$$\lambda_1 = 0.05/1$$

Then

$$B = \lambda_1 P_1 (1 + .009) = 0.04187 \text{ sec}^{-1}$$

and $B^{-1} \approx 24 \text{ sec.}$

Bibliography on Target Detection

1. Instruction Manual Air-to-Ground Attack System Evaluation Computer Program Model, SP73-A66, Revision A, Texas Instruments Inc., August 1967.
2. Dugas, D. J. and Peterson, H. E., An Experimental Investigation of the Effect of Target Motion on Visual Detection, R-614-PR, Rand Corp., February 1971.
3. Peterson, H. E. and Dugas, D. J., The Relative Importance of Contrast and Motion in Visual Target Detection, R-688-PR, Rand Corp., March 1971.
4. Banks, James, et al. Effects of Search Area Size on Target Acquisition With Passive Night Vision Devices, AD 722235, Army Behavior and Systems Research Laboratory, Arlington, Va., February 1971.
5. Wokoun, William, Detection of Random Low-Altitude Jet Aircraft by Ground Observers, Technical Memorandum 7-60, AD 238341, Human Engineering Laboratories, Aberdeen Proving Ground, June 1960.
6. Horley, G. L., Eckles, A. J. and Dax, R.E., Target Detection: A Comparison of Several Vision Systems Mounted in Stationary and Moving Tanks, (CONFIDENTIAL), Technical Memorandum 7-67, AD 392408, Human Engineering Laboratories, Aberdeen Proving Ground, March 1967.
7. Comparative Technology Study: Night-Vision Devices (U), (CONFIDENTIAL), AMC-CTS-14, US Army Foreign Science and Technology Center, August 1971.
8. Bailey, H.H. Target Detection Through Visual Recognition: A Quantitative Model, RM-6158-PR, AD866941, Rand Corp., February 1970.
9. Kirkpatrick, M., Kopala, E. W. and Smith, R. H., Aided Target Acquisition Performance Measurement Program, NR71H-19, North American Rockwell, Columbus Division for USAMICOM, March 1971.

LIST OF SYMBOLS FOR TARGET
- DETECTION/RECOGNITION SUBROUTINE

inputs

1. time k th target entered FOV of i th FO, $TENT(i,k)$
2. field of view boundaries and holes
3. time FO search begins
4. observer's position
5. target position and velocity
6. target identity code
7. intrinsic contrast of the target
8. visibility range
9. scene clutter factor
10. optical magnification

endogenous variables

1. scan limits of FOV
2. probability of foveal superposition, π_1
3. probability of detection of contrast, P_2
4. probability of recognition by form identification, P_3
5. detection rate parameter for the n th time interval
 u_n, B_n
6. recognition probability, $P_r(t_n)$

outputs

1. time at which detection occurs, if it occurs at all
2. indication of failure to detect while target is
within the i th FOV

DISTRIBUTION LIST

Copy No.

	Commander
	US Army Materiel Development and Readiness Command
1	ATTN: DRCRE
1	DRCPA-S
	5001 Eisenhower Avenue
	Alexandria, VA 22333
	Commander
	US Army Armament Materiel Readiness Command
1	ATTN: DRSAR-CG
1	DRSAR-DCG
1	DRSAR-LC
1	DRSAR-LE
1	DRSAR-CP
21	DRSAR-SA
1	DRSAR-PA
1	DRSAR-PC
1	DRSAR-PD
1	DRSAR-IM
1	DRSAR-OP
1	DRSAR-QA
1	DRSAR-IS
1	DRSAR-MM
1	DRSAR-MA
1	DRSAR-AS
1	DRSAR-SF
	Rock Island, IL 61201
1	Commander
	US Army Armament Research and Development Command
	ATTN: DRDAR-SEA
	Dover, NJ 07801
1	Commander
	US Army Test and Evaluation Command
	ATTN: DRSTE-SY
	Aberdeen Proving Ground, MD 21005
1	Commander
	US Army Electronics Command
	ATTN: DRSEL-SA
	Fort Monmouth, NJ 07703
1	Commander
	US Army Missile Materiel Readiness Command
	ATTN: DRSMI-D
	Redstone Arsenal, AL 35809

DISTRIBUTION LIST (Cont)

Copy No.

- 1 Commander
US Army Missile Research and Development Command
ATTN: DRDMI-DS
Redstone Arsenal, AL 35809
- 1 Commander
US Army Tank-Automotive Materiel & Readiness Command
ATTN: DRSTA-S
Warren, MI 48090
- 1 Commander
US Army Tank-Automotive Research & Development Command
ATTN: DRDTA-V
Warren, MI 48090
- 1 Commander
HQ, US Army Aviation Systems Command
ATTN: DRSAV-D
P.O. Box #209, Main Office
St. Louis, MO 64502
- 1 Commander
US Army Troop Support Command
ATTN: DRSTS-G
St. Louis, MO 63120
- 1 Project Manager for Cannon Artillery Weapons Systems
ATTN: DRCPM-CAWS
Dover, NJ 07801
- 1 Commander
US Army Development and Readiness Command
Office of the Project Manager for Selected Ammunition
ATTN: DRCPM-SA
Dover, NJ 07801
- 1 Project Manager for M110E2
ATTN: DRCPM-M110E2
Rock Island, IL 61201
- 1 Project Manager for Air Defense Gun Systems
ATTN: DRCPM-ADG
Rock Island, IL 61201
- 1 Product Manager for Production Base Modification & Expansion
ATTN: DRCPM-PBM
Dover, NJ 07801

DISTRIBUTION LIST (Cont)

Copy No.

- 1 Product Manager for Advanced Attack Helicopter Systems
US Army Aviation Systems Command
St. Louis, MO 63166
- 1 Product Manager for AH-1 Cobra Series Aircraft
US Army Development & Readiness Command
P.O. Box #209
St. Louis, MO 63166
- Commander
Rock Island Arsenal
- 1 ATTN: SARRI-CO
- 1 SARRI-ADL
Rock Island, IL 61201
- 1 Commander
Watervliet Arsenal
ATTN: SARWV-CO
Watervliet, NJ 12189
- 1 Commander
Picatinny Arsenal
ATTN: SARPA-PA-S
Dover, NJ 07801
- 1 Commander
Edgewood Arsenal
ATTN: SAREA-DE-N
Aberdeen Proving Ground, MD 21010
- 1 Commander
Human Engineering Laboratories
ATTN: DRXHE-D
Aberdeen Proving Ground, MD 21005
- 1 Commander
US Army Materiel Systems Analysis Activity
ATTN: DRXSY-D
Aberdeen Proving Ground, MD 21005
- 1 Commandant
US Army Field Artillery Center
Fort Sill, OK 73503

DISTRIBUTION LIST (Cont)

Copy No.

1	Commandant US Army Infantry School Fort Benning, GA 31905
1	Commander US Army Missile & Munitions Center & School Redstone Arsenal, AL 35809
1	Commandant US Army Air Defense School Fort Bliss, TX 79916
1	Director US Army Management Engineering Training Agency ATTN: DRXOM-QA Rock Island, IL 61201
1	Commander US Army TRADOC Systems Analysis Activity White Sands Missile Range White Sands, NM 88002
1	Director Advanced Research Projects Agency 1400 Wilson Boulevard Arlington, VA 22209
1	Commander Defense Logistics Studies Information Exchange Fort Lee, VA 23801
1	Commander US Army Logistics Management Center ATTN: DRXMC-LS Fort Lee, VA 23801
1	Commander US Army Logistics Center ATTN: ATCL-S Fort Lee, VA 23801
12	Defense Documentation Center Cameron Station Alexandria, VA 22314

Next page is blank.